

HAND DRYERS SENSOR OPERATED SANIFLOW 05

STEEL WHITE EPOXY

E05A

Units per box: 1
Units per pallet: 32 (A)



COMPONENTS & MATERIALS

- ▶ Steel one-piece cover white epoxy coated, 1,5 mm thick.
- ▶ Dimensions: 245 x 276 x 210 mm.

STAINLESS STEEL AISI 304 BRIGHT FINISH

E05AC

Units per box: 1
Units per pallet: 32 (A)



COMPONENTS & MATERIALS

- ▶ Stainless steel AISI 304 one-piece cover bright finish, 1,5 mm thick.
- ▶ Dimensions: 245 x 276 x 210 mm.

STAINLESS STEEL AISI 304 SATIN FINISH

E05ACS

Units per box: 1
Units per pallet: 32 (A)




COMPONENTS & MATERIALS

- ▶ Stainless steel AISI 304 one-piece cover satin finish, 1,5 mm thick
- ▶ Dimensions: 245 x 276 x 210 mm.

- ▶ Cover fixed to the base by means of 2 vandal-proof lock screws and lock with special Saniflow® wrench.
- ▶ Base in aluminium, 3 mm thick, with 4 Ø 8 mm holes for wall mounting.
- ▶ Fire resistant plastic UL 94-V0 fan scroll.
- ▶ Universal brush motor, 5500 rpm, F class, incorporates a self-resetable safety thermal cut-off at 120 °C.
- ▶ Aluminium centrifugal double symmetrical inlet fan wheel.

- ▶ Waved wire NiCr heating element on a mica frame that incorporates a self-resetable safety thermal cut-off at 80 °C.
- ▶ Nozzle in chrome plated zamak, 22 µm thick.
- ▶ Fully adjustable (15 - 25 cm) IR electronic detection sensor.
- ▶ Sensors come with a polycarbonate viewing window.
- ▶ Leds integrated in the electronic board.

Saniflow 05: E05A E05AC E05ACS

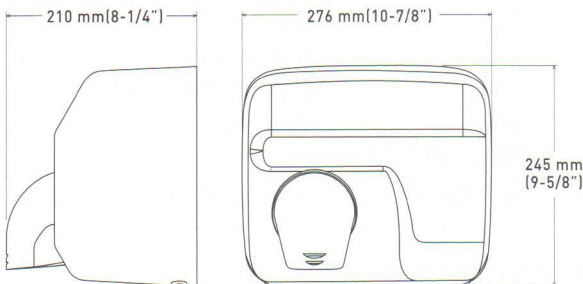

Voltage	220-240 V	Total power	2250 W
Frequency	50/60 Hz	Motor power	250 W
Electrical isolation	Class I	Heating element power	2000 W
Consumption	10 A	Protection level	IP23
Weight	4,65 Kg	r.p.m.	5500
Effective airflow	330 m³/h 5500 l/min	Air temperature (at 10 cm distance at 21°C)	53° C
Nominal airflow	470 m³/h 7800 l/min	Drying time	29 sec
Air velocity	96 Km/h	Noise level (at 2 m)	70 dB

NOTE: Drying time may vary depending on conditions

TECHNICAL SPECIFICATIONS