STEEL WHITE EPOXY

M99A

Units per box: 6
Units per pallet: 48 (B)

COMPONENTS & MATERIALS

- Steel one-piece cover white epoxy coated, 1,5 mm thick.
- Dimensions: 302 x 260 x 150 mm.

STAINLESS STEEL AISI 304 BRIGHT FINISH

M99AC

Units per box: 6
Units per pallet: 48 (B)

COMPONENTS & MATERIALS

- Stainless steel AISI 304 one-piece cover, bright finish, 1,5 mm thick.
- Dimensions: 302 x 260 x 150 mm.

STAINLESS STEEL AISI 304 SATIN FINISH

M99ACS

Units per box: 6
Units per pallet: 48 (B)

COMPONENTS & MATERIALS

- Stainless steel AISI 304 one-piece cover satin finish, 1,5 mm thick.
- Dimensions: 302 x 260 x 150 mm.

- Cover fixed to the base by means of 4 Allen head screws.
- Fire resistant thermoplastic ABS UL 94-V0 base and fan scroll, with 4 Ø 8 mm holes for wall mounting.
- Induction motor, 2800 rpm, F class, maintenance-free and high durability, incorporates a self-resetable safety thermal cut-off at 130 °C.
- PP UL94-V0 with single inlet fan wheel.
- Waved wire NiCr heating element that incorporates a self-resetable safety thermal cut-off at 70 °C.
- Two distances (15/25 cm) IR electronic detection sensor.
- Zamak air outlet grill.

Optima: M99A M99AC M99ACS

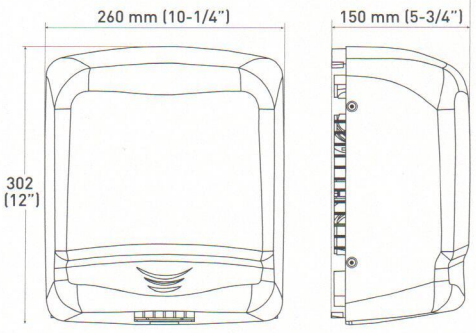

Voltage	220-240 V	Total power	1640 W
Frequency	50/60 Hz	Motor power	140 W
Electrical isolation	Class II	Heating element power	1500 W
Consumption	7 A	Protection level	IP21
Drying time	38 sec	r.p.m.	2800
Effective airflow	240 m³/h 4000 l/min	Air temperature (at 10 cm distance at 21°C)	52° C
Nominal airflow	280 m³/h 4670 l/min	Weight M99A M99AC/CS	4,45 Kg 4,25 Kg
Air velocity	65 Km/h	Noise level (at 2 m)	60 dB

NOTE: Drying time may vary depending on conditions

TECHNICAL SPECIFICATIONS